




## China 6202 Bearing Supplier

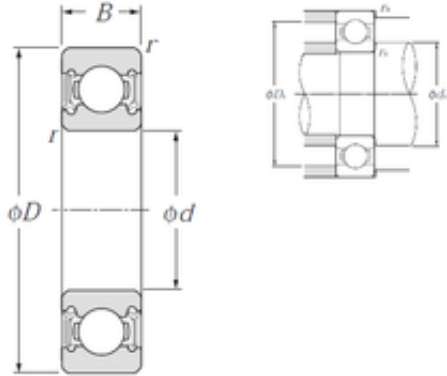

6302LLU Bearing 2D drawings and 3D CAD models

### NTN 6302LLU Deep Groove Ball Bearing NTN 6302 Zz Motorcycle Spare Parts Bearing 6302-2RS Chinese Supplier

Bearing No. 6302LLU

Size	15x42x13 mm
Bore Diameter	15 mm
Outer Diameter	42 mm
Width	13 mm
d	15 mm
D	42 mm
B	13 mm
C	13 mm
r min.	1 mm
da min.	20 mm
da max	23 mm
Da max.	37 mm
ra max.	1 mm
Weight	0,082 Kg
Basic dynamic load rating (C)	11,4 kN
Basic static load rating (C0)	5,45 kN
Reference speed	12 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.083
EAN	0692314551950
Product Group	B00308



## China 6202 Bearing Supplier

Enclosure	2 Seals
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	15MM Bore; 42MM Outside Diameter; 13MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Other Features	Deep Groove   Double Lip Friction Nitrile Rubber Seal   -20 To 120 Deg C
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	6302LLU
Weight / LBS	0.181
Inner Race Width	0 Inch   0 Millimeter
Outer Race Width	0.512 Inch   13 Millimeter
Outside Diameter	1.654 Inch   42 Millimeter
Bore	0.591 Inch   15 Millimeter



## China 6202 Bearing Supplier

bore diameter:	15 mm
static load capacity:	5450 N
outside diameter:	42 mm
precision rating:	ISO Class 0
overall width:	13 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	13 mm
snap ring included:	Without Snap Ring
outer ring width:	13 mm
internal clearance:	CN
maximum rpm (grease):	12000 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	1 mm
dynamic load capacity:	11400 N
manufacturer product page:	<a href="#">Click here</a>